




**TYPE A RAMP**

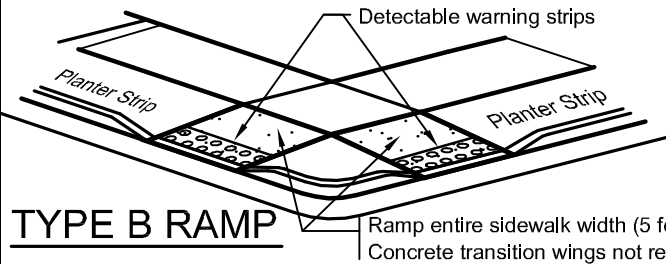

**TYPE B RAMP**

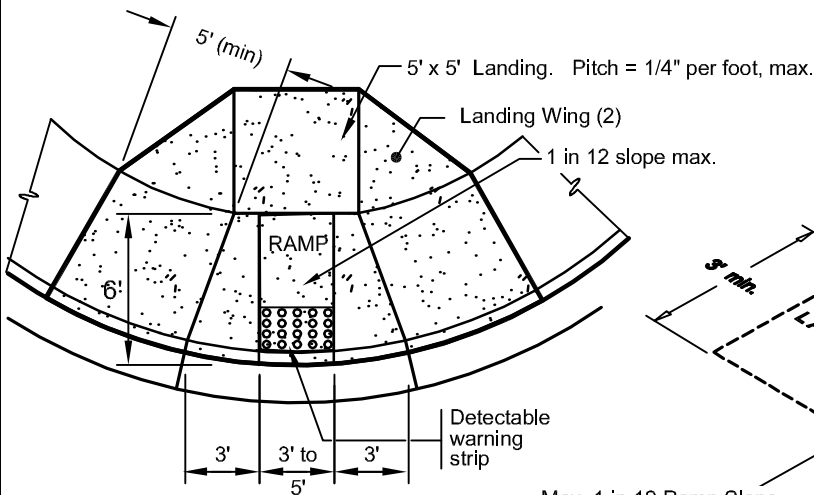


**PLAN (Type "A")**

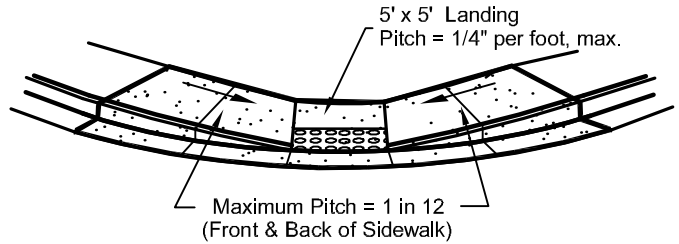


**TYPE C LANDING - RAMP**

Full-Radius Style

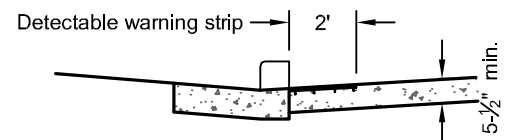

**CROSS SECTION**

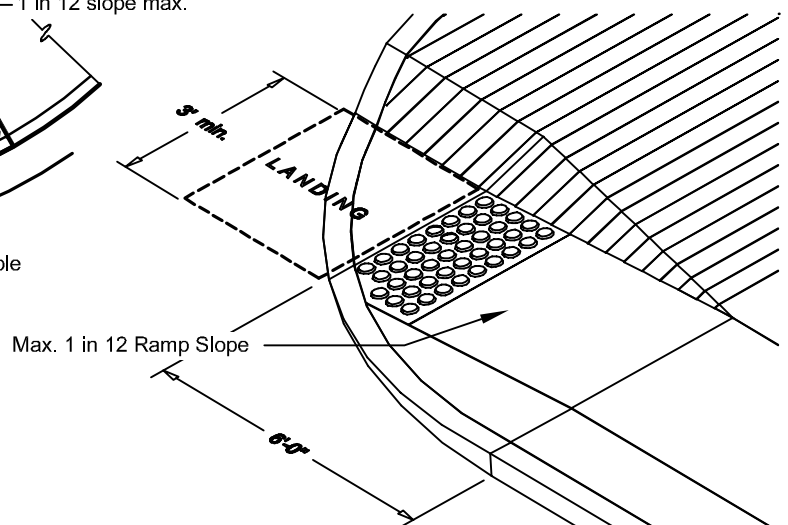

**PARALLEL CURB RAMP**

**NOTES:**

1. Ramp cross slopes and landing slopes should not exceed 2%.
2. Ramps shall be flush at the gutter flow line.
3. Construction of Type B ramps is preferred where both sidewalks are set back from the curb by an earth strip.
4. Curb Ramps are required with all curb types.
5. Detectable warning strips shall consist of a 24" x [ Ramp Width ] truncated-dome style surface. Color shall be Federal Yellow.
6. Construction of Type C ramps is allowed only where site conditions preclude construction of Type A or B ramps; obtain Engineer's approval before constructing Type C ramps.

AutoCAD: Curb Ramp - 2006 Rev.dwg

06.dwg

# CURB RAMP DETAILS FOR ARTERIAL STREETS

PAGE NO:

9

CITY OF PULLMAN  
ENGINEERING DIVISION

ADOPTED: April 8, 2008